

APPROVAL SHEET

Customer:

Customer P/N:

SNOWFAN Model NO.: **QC4010M24S**

SNOWFAN P/N:

Version.: **1** **Sample NO.:**

Issue date: **2022-10-15** **Quantity:** **2** **PCS**

***Please sign back this specification for our record upon your approval. Thanks!**

Company Stamp
制作:
复核:
核准:


Customer approval Stamp
承认:
核准:
日期:

地址： 佛山市南海区大沥镇环洲三路万益广场 14 栋

电话： 18565495111

1.0： 一般规格（General Specification）

项目 Item	规格/条件 Specification/Condition
---------	-------------------------------

1	型号 Model No.	QC4010M12B	
2	外型尺寸 Outline. Dimension	40*40*10mm	
3	工作电压 Operating Voltage	DC 7 ~ 25.5V	
4	额定电压 Rated .voltage	DC 24V	
5	启动电压 Starting Voltage	DC ≤7V on/off	
6	额定电流 Rated current	0.1A(Max:0.12A)	a. 额定电压 Rated .voltage b. 25°C 65% RH c. After testing for 5 minutes
7	消耗功率 Power consumption	2.4W(Max:2.6W)	
8	转速 Speed	6000±10%RPM	
9	风量 Airflow AT ZERO STATIC PRESSURE	4.94CFM (Min: 4.90CFM)	a. 额定电压 Rated .voltage b. AMCA 标准 Standard C. 额定电流 Rated current
	静压 Air .Static Pressure AT ZERO AIRFLOW	3.43mmH2O (Min.3.23mmH2O)	
10	噪音标准 Noise Level	32.30dB-A (Max: 32.12dB-A)	a. 额定电压 Rated Voltage b. 18dB无响室 18dB Non-Echo Chamber c. 标准 Standard: CNS 8753 / ISO 3744 d. Test Condition :ISO 7779 e. 距离 Distance: 1.0 M
11	期望寿命 Life expectancy	50000 hrs at temp25°C Humidity5% ~ 95%	MTTF Mean Time To Failure Conf. Level 90%
12	扇叶数 No.of.Blade	轴流叶	
13	极数 No.of.Pole	4 极	
14	运转方向 Rotating Direction	逆时针/运转方向是从扇叶面看	
15	锁住保护 Lock Protection	□无 NO	
16	极性保护 Polarity Protection	Vcc与GND反接时 不导通. Open circuit when Vcc & GND are exchanged	
17	过流保护 Over current protection	□无 NO	
18	恒速功能 fixed constant speed Function	□无 NO	
19	PWM 功能 PWM function	无 NO	
20	PQ 曲线 PQ curve		

2.0:主要材料/零件规格 (Main Materials/parts Specification)

材料/零件 Materials/parts	规格 Specification
--------------------------	---------------------

1	塑料材料/ 外框扇叶 Plastic Material/ Frame impeller	PBT 黑色框扇			
2	轴承 Bearing Type	含油轴承 Bearing			
3	引线 Lead Wire	1007 外露 280±10mm #24#黑红线			
4	端子 Connector	2.54 白色正端-2P			
		黑	红		
		GND	VCC		
5	环保要求 Environmental Requirement	 环保防火	 非环保非防火	 防火非环保	

3.0 电性规格 (Electrical Specifically)


1	绝缘阻抗 Insulation Resistance	10MΩ/裸线 与 外框 间 测量, 500VDC/min 10MΩ/between unshackled wire and frame at 500VDC/min
2	绝缘耐压 Dielectric Strength	5Ma Max./导线 与 外框 间 测量, 500VAC/min 5Ma Max./Measured between lead wire(+)and frame at 500VAC/min
3	防水等级 Waterproof level	IP 0

4.0 环境测试 (Environmental Specification)

1	运转温/湿度范围 Operating Temp .Range	温度/Temperature:-10℃ ~ +70℃ 湿度/Humidity:5% ~ 95%RH
2	保存温/湿度范围 Storage Temperature	温度/Temperature:-40℃ ~ +75℃ 湿度/Humidity:5% ~ 95%RH
3	耐湿性 Humidity	电气规格依据 MIL-STD 202F Method 103B 湿度: 95%RH 温度: 40±2℃
4	热冲击 Thermal Shock	电气规格依据 MIL-STD 202F Method 107D Per MIL-STD 202F Method 107D,Condition D
5	绝缘阶段 Insulation Shock	UL: A 级 UL: Class A
6	包装耐振动试验 Packing Vibration Test	包装后,XYZ 三方向施 1.1G load vibration test for 30min .No serious damage
7	包装耐冲击试验 Packing Shock Proof Test	捆包后, 高 60 公分, 1 棱角 3 边 6 面自然落下, 无严重损坏. 1 corner, 3 edges, 6 faces natural drop from 60cm high packing No serious damage
8		

5.0 在无响室额定电压下之噪音测试

(Noise is measured at rated voltage in anechoic)

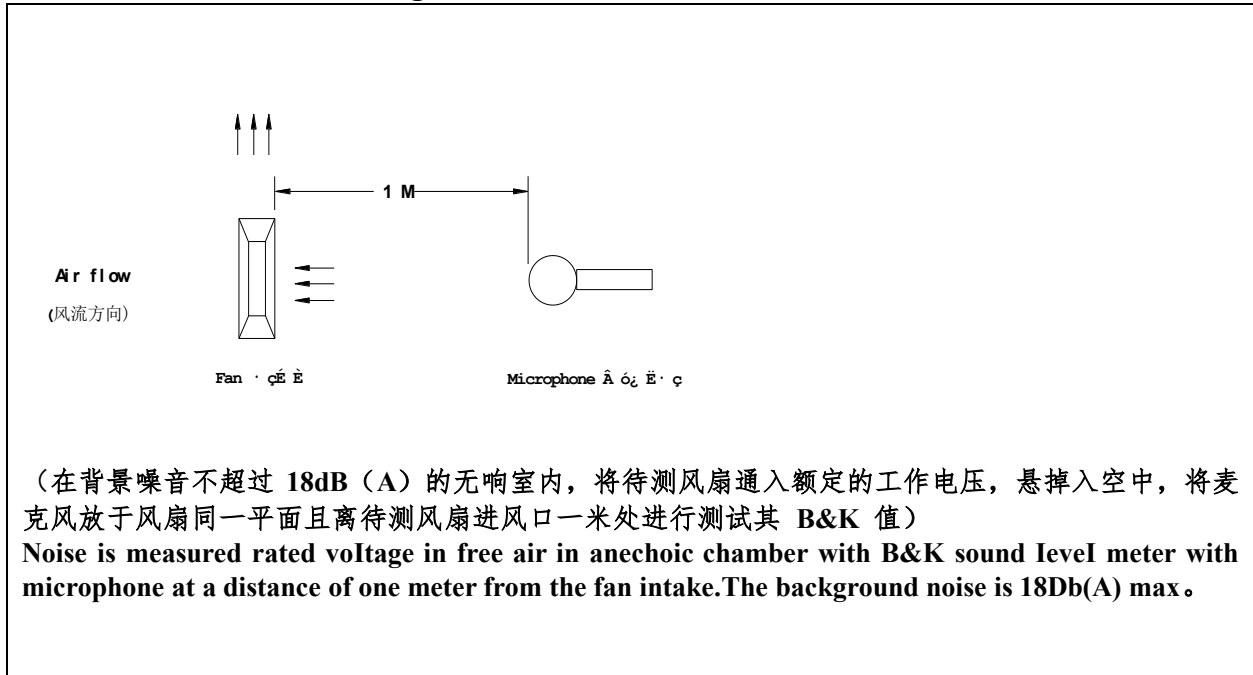

注意事项 (NOTES)

1 Before use, make sure the supply voltage to meet the use of the product range, line-powered load exceeds the maximum power consumption of this product 120%.

And the voltage is stable without clutter

(使用前，确认供电电压能满足本产品的使用范围，供电电路负载超过本产品的最大功耗的120%。且电压是稳定不含杂波干扰)

2 Please when ventilator circular telegram normal work do not use the hand to bump touches fan blade border

(请在风扇通电正常运转时不要用手碰触扇叶边沿)

3 Please do not touch the impeller and never carry the fan the lead wires. The bearings and the lead wires may be damaged. Additionally, static electricity may damage the intemal ciruits of the fan

(请不要碰触扇叶和拉扯线材，以免损坏轴承及导线。此外，静电可能损坏内部的风扇组件)

4 Please do not use the fan in the environment of corrosive gas or liquid.

(请不要将风扇置于腐蚀的气体 and 液体内)

5 Please do not store the fan in the environment of high humidity. Please avoid storage of the fan over 6 months. For long term storage, please connect power to the fan shortly every 6 months even though the fan is stored in room temperature.

(请不要将风扇储存在高湿度的环境中, 请尽量避免将风扇储存期超过 6 个月。如果要长期储存, 请将其在室温的环境下。且每隔 6 个月须上电源让风扇短时间运转。)

