

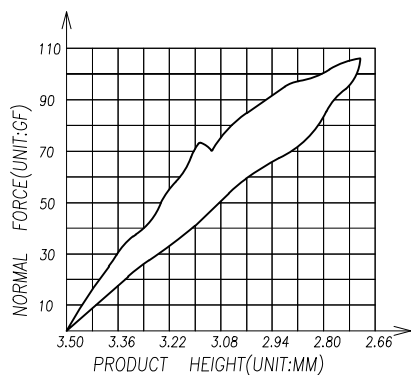
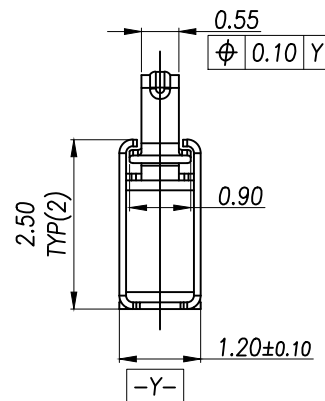


3D View

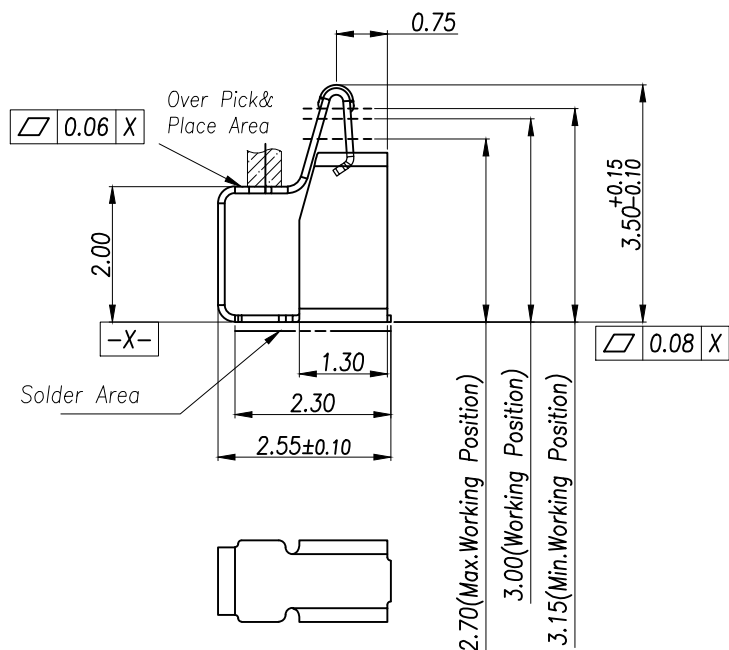

(For Reference Only)
Stated At Compression

NOTES:

1:MATERIAL

1-1: SUS-301 THICKNE=0.10MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.5V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C


3:DURABILITY: 1500 CYCLES

4:SALT SPRAY TIME: 24H

5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6:REQUIREMENTS




6-1: TERMINAL TO EAT FULL TIN, NOT PEELING,
WELDING OBVIOUS COLOR AND OTHER ADVERSE
6-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS



METAL MASK T=0.08


TOLERANCE: ±0.05MM
(FOR REFERENCE ONLY)

GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE: 1:1 UNIT: MM	 瑾珩精密	
	DRAWN BY LUDAH		
DISTANCE ANGLE X. ±0.30 X.* ±2.0° .X ±0.20 .X* ±1.0° .XX ±0.15 .XX* ±0.5°	CHECKED BY /	TITLE: 天线弹片 L2.55*W1.20*H3.50	
	DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS	PART NO. TP-T1-3531	MANUFACTURE DWG SCALE: N/A SHEET: 1/2

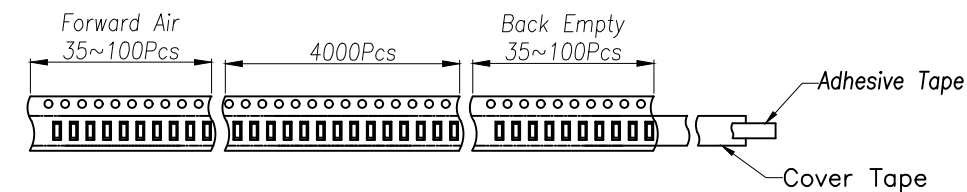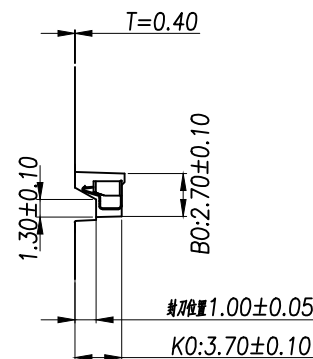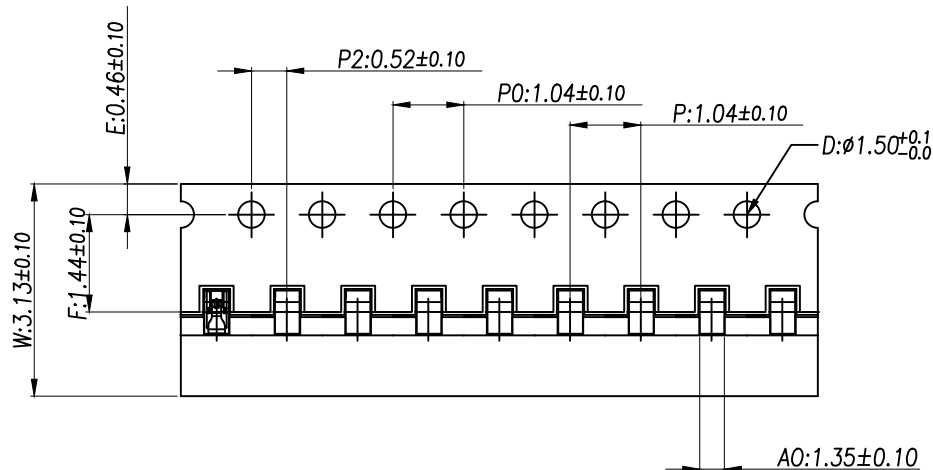


Customer To Use Direction

Pull Out Direction
(出料方向)


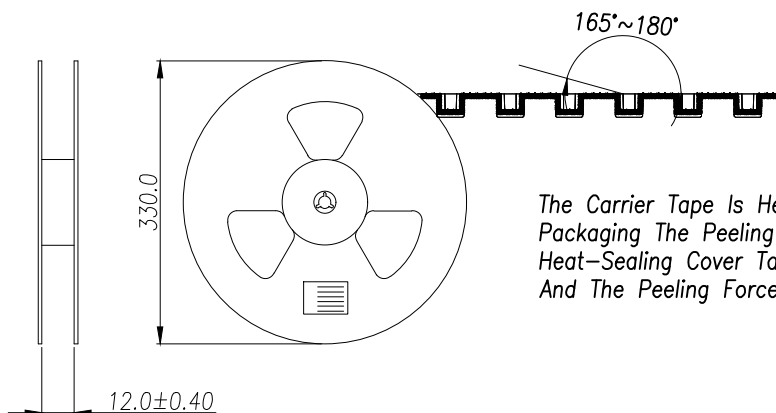


The Carrier Tape Is Heat-Sealed Packaging The Peeling Angle Of The Heat-Sealing Cover Tape Is 165°~180° And The Peeling Force Is 30~120g.

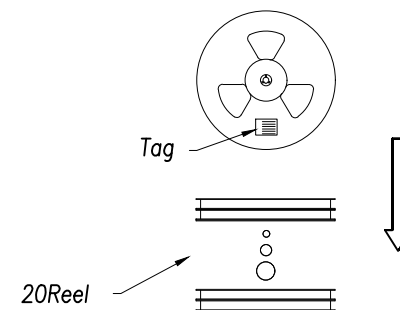

Carton Size
290*330*4 K3K

Carton Size
345*345*360 K=K

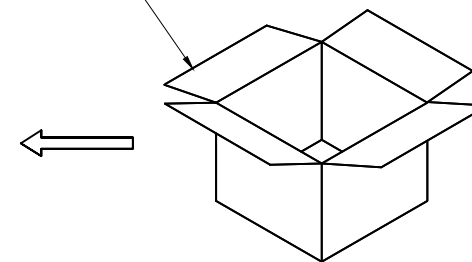

GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM		 瑾珩精密			
	DRAWN BY LUDAH					
DISTANCE ANGLE X. ±0.30 X.* ±2.0° .X ±0.20 .X* ±1.0° .XX ±0.15 .XX* ±0.5°	CHEVKED BY /		TITLE: 天线薄片 L2.55*W1.20*H3.50		MANUFACTURE DWG	
	DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS		PART NO. TP-T1-3531		SCALE N:A	SHEET 2:2
LUJIAH						