

(For Reference Only)
Stated At Compression

NOTES:

1:MATERIAL

1-1: YCUT-FX-EH THICKNE=0.08MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 5.0V

2-3: CONTACT RESISTANCE: 50mΩ/MAX

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C

3:DURABILITY: 20000 CYCLES





4:SALT SPRAY TIME: 48H

5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 60-120u"

6:REQUIREMENTS


6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE

6-2:ROHS.REACH.HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS


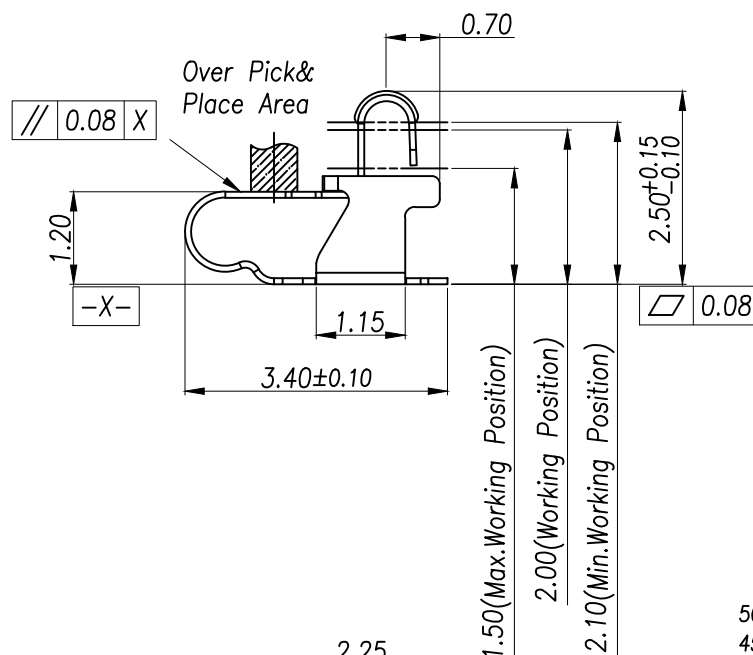


RECOMMENDED PCB LAYOUT


TOLERANCE:±0.05MM (FOR REFERENCE ONLY)

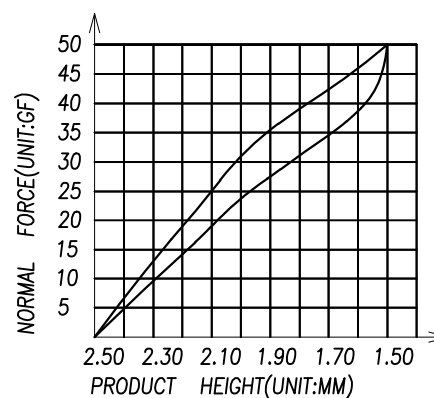


GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM		 瑾珩精密	
	DRAWN BY			
	LUDAH		TITLE: 天线薄片 L3.40*W1.00*H2.50	
	CHEVKED BY			
DISTANCE ANGLE X. ±0.30 X.* ±2.0° .X ±0.20 .X* ±1.0° .XX ±0.15 .XX* ±0.5°	/		MANUFACTURE DWG	
	DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS	LUJIAH		PART NO. TP-T0-2561
		SCALE N:A		
			SHEET 1:2	

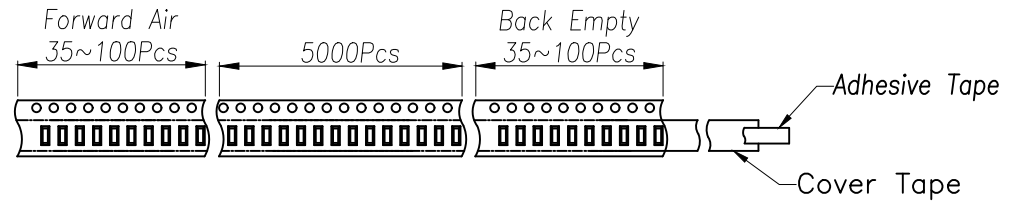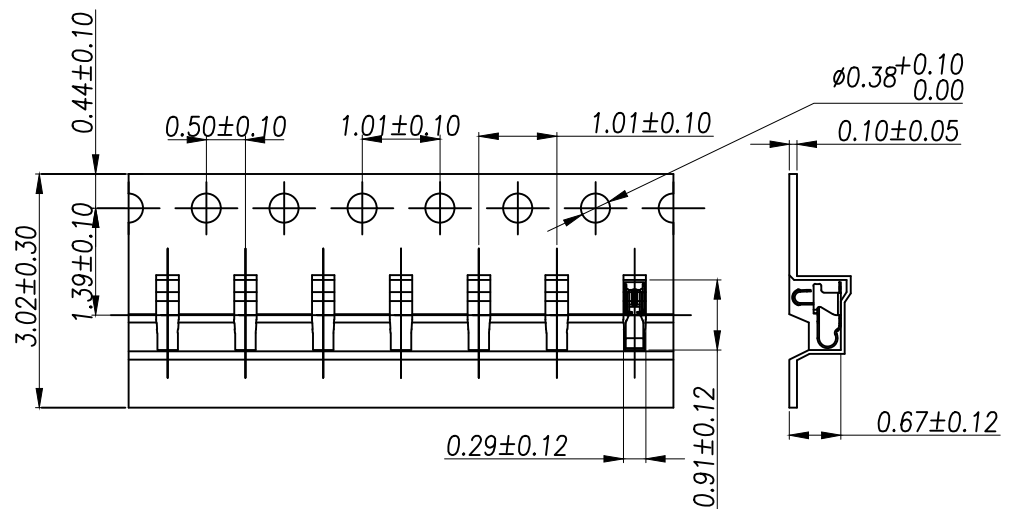

Customer To Use Direction Pull Out Direction (出料方向)

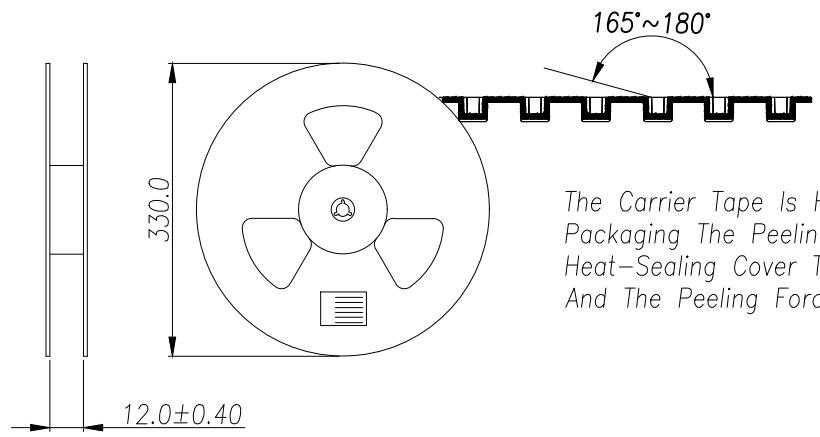

The Carrier Tape Is Heat-Sealed Packaging The Peeling Angle Of The Heat-Sealing Cover Tape Is 165°~180° And The Peeling Force Is 30~120g.

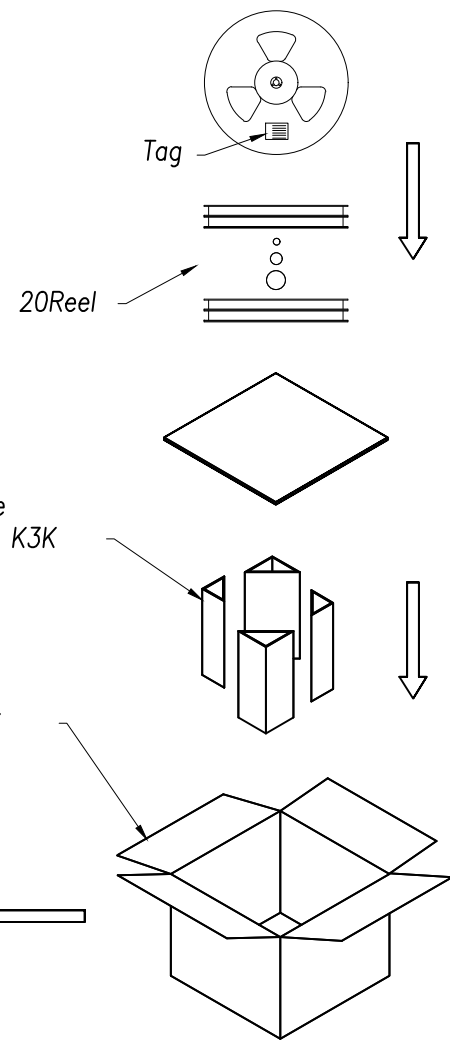

GENERAL TOLERANCES (UNLESS SOECIFIED)		SCALE: 1:1 UNIT: MM		 瑾珩精密	
DISTANCE ANGLE		DRAWN BY			
X. ±0.30	X.* ±2.0°	LUDAH		TITLE: 天线薄片 L3.40*W1.00*H2.50	
.X ±0.20	.X* ±1.0°	CHEVKED BY			
.XX ±0.15	.XX* ±0.5°	/		MANUFACTURE DWG	
DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS				PART NO.	
		LUJIAH		TP-T0-2561	
				SCALE	SHEET
				N:A	2:2