


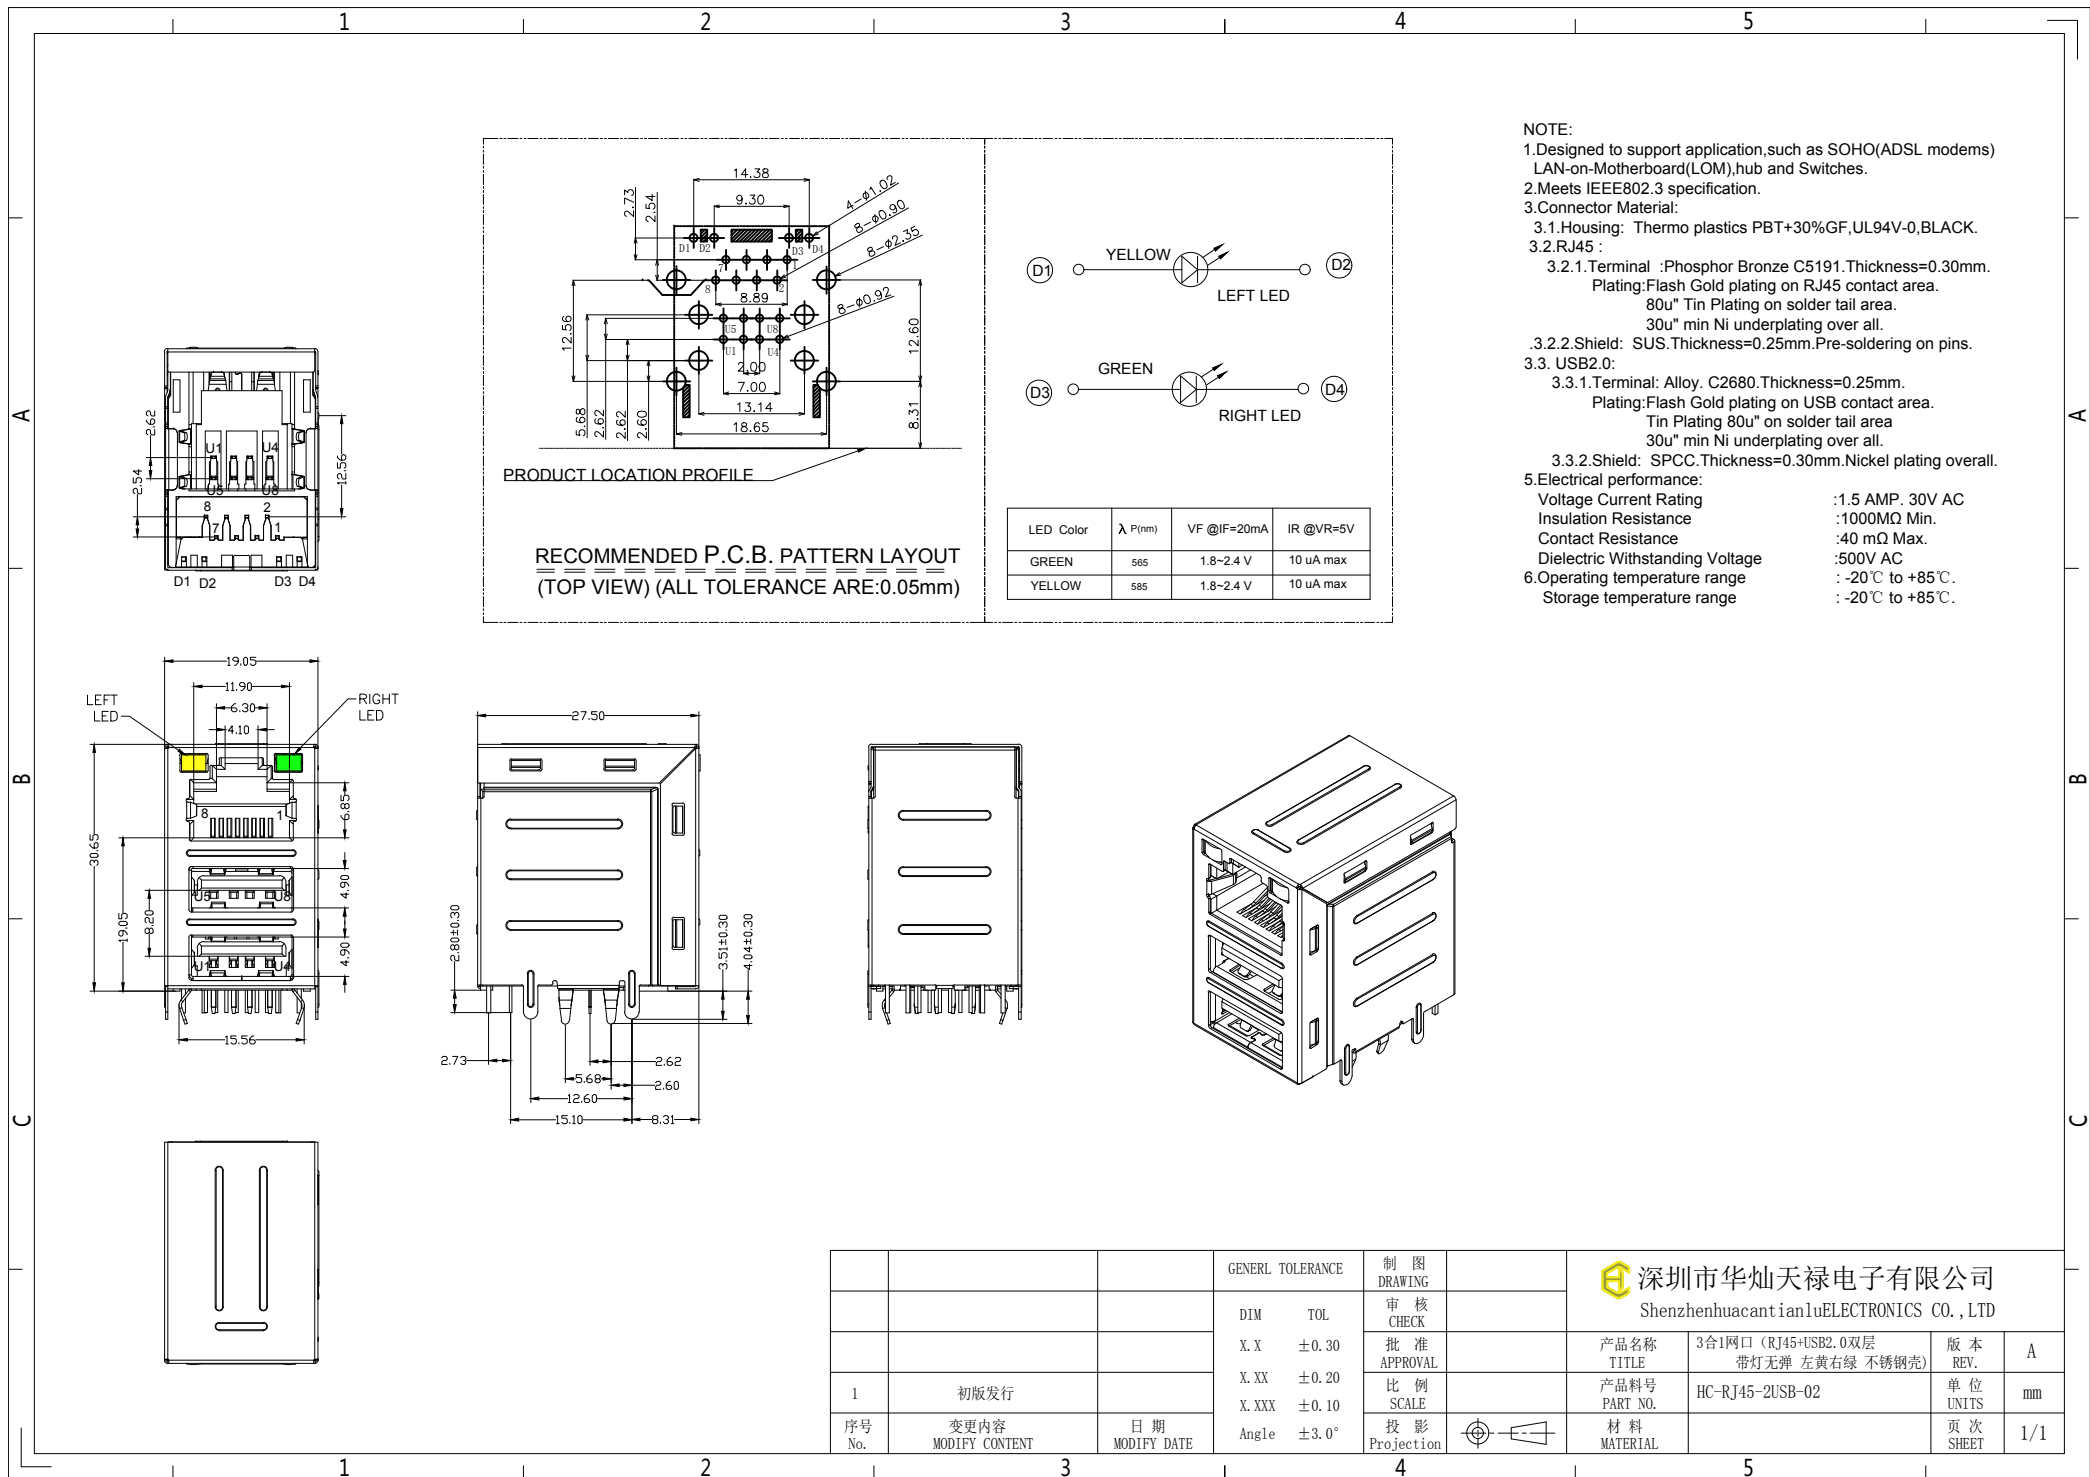

NOTE:

1.Designed to support application,such as SOHO(ADSL modems)
LAN-on-Motherboard(LOM),hub and Switches.

2.Meets IEEE802.3 specification.

3.Connector Material:

3.1.Housing: Thermo plastics PBT+30%GF,UL94V-0,BLACK.

3.2.RJ45 :

3.2.1.Terminal :Phosphor Bronze C5191.Thickness=0.30mm.
Plating:Flash Gold plating on RJ45 contact area.
80u" Tin Plating on solder tail area.
30u" min Ni underplating over all.

3.2.2.Shield: SUS.Thickness=0.25mm.Pre-soldering on pins.

3.3. USB2.0:

3.3.1.Terminal: Alloy. C2680.Thickness=0.25mm.
Plating:Flash Gold plating on USB contact area.
Tin Plating 80u" on solder tail area
30u" min Ni underplating over all.

3.3.2.Shield: SPCC.Thickness=0.30mm.Nickel plating overall.

5.Electrical performance:

Voltage Current Rating :1.5 AMP. 30V AC

Insulation Resistance :1000MQ Min.

Contact Resistance :40 mΩ Max.

Dielectric Withstanding Voltage :500V AC

6.Operating temperature range : -20℃ to +85℃.

Storage temperature range : -20℃ to +85℃.

			GENE RL TOL E RANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK	产品名称 TITLE	3合1网口 (RJ45+USB2.0双层 带灯无弹 左黄右绿 不锈钢壳)	版 本 REV.	A
			X. X ±0.30	批 准 APPROVAL	产品料号 PART NO.	HC-RJ45-2USB-02	单 位 UNITS	mm
1	初版发行		X. XX ±0.20	比 例 SCALE	材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X. XXX ±0.10	投 影 Projection				
			Angle ±3.0°					